

ProAccess 8

Multi Door Controller



The American Access Systems, Inc. **ProAccess 8** multi door controller is one of the most cost effective, non PC based card reader controllers on the market. Each master controller is designed to operate four, six or eight 26 bit wiegand output card readers (see the AAS **RemotePro CR** line), where all programming and auditing is done from the master station.

The **ProAccess 8** multi door controller comes standard with 2000 card capability, seven time zones, and a 1000 transaction memory buffer that can be printed out on an RS-232 serial port printer (AAS #21-045 or #21-047). The controller will report time, date, card number entered, which relay was activated and valid / invalid card. When the AAS #21-047 desk printer is used, the invalid cards can be printed in red ink on the report.


The wall mount **ProAccess 8** controller has full programming capabilities without opening the cover and has an LCD screen for easy programming. The programmable personal master code ensures the security of all programming functions. Mounted inside the locked cabinet are the relays, all the wiring terminals and the optional battery backup. The cabinet is manufactured using heavy gauge steel that has an attractive, durable, baked on finish.



American Access Systems, Inc.

YOUR PARTNER IN ACCESS CONTROL

ProAccess 8

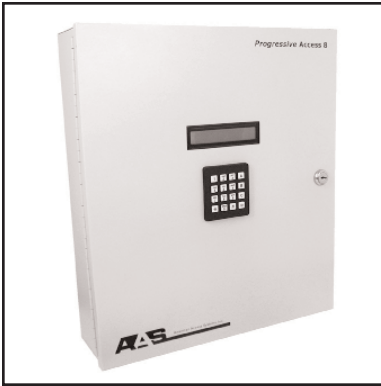

25-4004 (four door)
25-4006 (six door)
25-4008 (eight door)

General Specifications

- Power requirements: 18VAC (transformer included)
- 24VDC Battery Backup Available
- Output:
 - 25-4004: 4 relays, n/o or n/c contact 1-99 second
 - 25-4006: 6 relays, n/o or n/c contact 1-99 second
 - 25-4008: 8 relays, n/o or n/c contact 1-99 second
- 26 bit wiegand protocol
- Operating temperature: -15 to 175 Fahrenheit
- Dimensions: 16.00h x 14.00w x 4.00d
- Ship weight: 13 lbs.

Relay Specs

	<u>DC Load</u>	<u>AC Load</u>
Contact Rating	6A @ 30V	6A @ 240V

Features

- 2000 card capacity
- Programmable Personal Master Code
- Alarm shunt
- LCD screen for programming
- 7 Programmable Time Zones
- Individual door control from master controller
- 1000 transaction storage buffer
- Optional Battery Backup
- RS-232 Serial Printer Port
- Non-volatile memory
- Non-volatile clock
- Limited two year warranty
- Compatible with all AAS *RemotePro CR* units

Manufactured by:

American Access Systems, Inc
7079 S Jordan Rd. Unit 6
Englewood, CO 80112
ph: (800) 541-5677
fx: (303) 799-9756
www.americanaccess.com

Distributed by: